

Project

Item #

Quantity



GLOBE FOOD EQUIPMENT COMPANY

Label Printing Scale

GSP30A



GSP30A Label Printing Scale



Model

GSP30A - Label Printing Scale



NTEP Approved
Meets NIST
Handbook 44 Criteria
Legal for Trade



Standard Features

- Weighs from .01 lb. to 30 lbs.
- Stores up to 3800 PLU's
- Thermal dot printer
- Scale prints
 - PLU name
 - Extra message
 - Sell by date
 - Packed date
 - Unit price
 - Tare
 - Weight
 - PLU number
 - Total price
 - Bar code
 - Store name
 - Store address
- Automatic or digital entry tare
- 88 one-touch preset keys
- Fluorescent tube display of tare, weight, unit price, and total price
- Stainless steel platter

Options and Accessories

- Standard labels (Case of 12 Rolls)
- Safe handling labels (Case of 12 Rolls)

Standard Warranty

- 1 year parts and labor

Approved By: _____

Date: _____



GLOBE FOOD EQUIPMENT COMPANY



www.globeslicers.com

P.O. Box 3209
Dayton, OH 45401
Phone: 937-299-5493
Phone: 800-347-5423
Fax: 937-299-4147



Specifications

| | |
|----------------------|---|
| Capacity: | 30 lbs. x .01 lb. |
| Platter Size: | 14.02" x 9.21" (35.61cm x 23.39cm) |
| Construction: | Durable ABS (white), Stainless Steel Platter |
| Display: | Fluorescent, Tube, .5" High |
| Display Information: | Tare, Weight, Unit Price, Total Price |
| Preset Keys: | 88 One-Touch Preset Keys |
| Programmable PLU's: | Up to 3800 PLU's |
| Power Requirements: | 115-60-1, .9 amps |
| Cord and Plug: | Attached 6 ft. Flexible 3 Wire Cord and Plug Fits Grounded Receptacle |
| Tare: | Automatic or Digital Entry |
| Dimensions: | 16.13"W x 16.25"D x 6.75"H (40.97cm W x 41.27cm D x 17.14cm H) |
| Zero: | Auto Zero Tracking on Power Up |
| Keypad: | Laminated Membrane, Audible Tone Feedback |
| Weight: | Net 21 lbs. (9 kgs.), Shipping 25 lbs. (11 kgs.) |

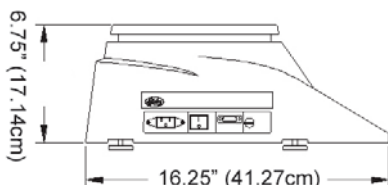

Safe Handling Label (Part E12)



Standard Label (Part E11)



GLOBE FOOD EQUIPMENT COMPANY

www.globeslicers.com

P.O. Box 3209
Dayton, OH 45401
Phone: 937-299-5493
Phone: 800-347-5423
Fax: 937-299-4147

Specifications are subject to change without notice.